

indoor




TRIPLE PLUS




3+HWM

Specifications


Code	Power (W)	Voltage (V)	Lumen Efficiency (Lm/W)	Colour Temperature (K)	CRI	IP Rating
3+HWM-7W	7W	220V-240V	110Lm/W	3000K-5000K	≥90	IP44
3+HWM-9W	9W	220V-240V	110Lm/W	3000K-5000K	≥90	IP44
3+HWM-12W	12W	220V-240V	110Lm/W	3000K-5000K	≥90	IP44
3+HWM-15W	15W	220V-240V	110Lm/W	3000K-5000K	≥90	IP44
3+HWM-18W	18W	220V-240V	110Lm/W	3000K-5000K	≥90	IP44

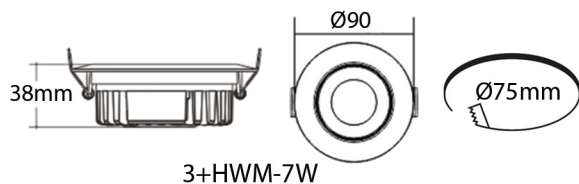


3+HWM-7W

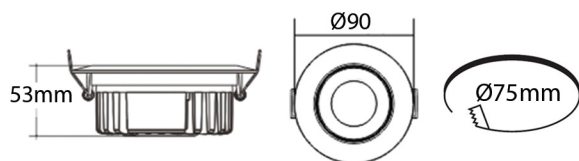

3+HWM-9W
3+HWM-12W

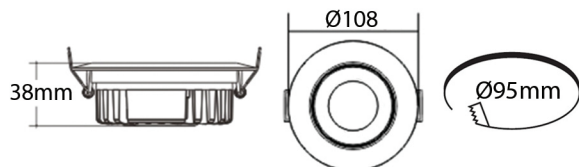

3+HWM-15W

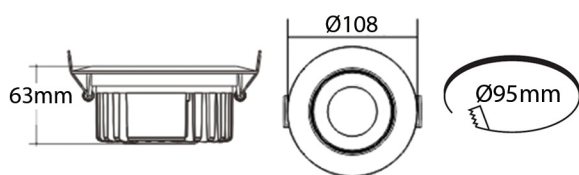

3+HWM-18W

LED	Bridgelux COB
Beam Angle	Spot Beam : 16°-20° Medium Beam : 25°-35° Wide Beam : 40°-60° Elliptical : 5°+25° , 15°+55°
Tilt Rotation	±30°
Material	Die-cast Aluminium
Diffuser	UV Stabilized Polycarbonate
Reflector	Matt / Chrome / Mirror Finish
Colour	Sandy Black / Sandy White
Working Temperature	-20°C ~ +50°C

