




TRIPLE PLUS

IP66 LED FIXTURE 3+I81E Series

Standard Ver.
Emergency Ver.
Microwave Motion Sensor Ver.

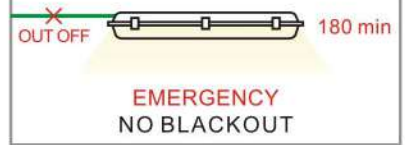

Emergency Power:3W-10W
Battery:Ni-Cd/Ni-Mh
Recharge time:24 hours
Use time:1.5hours/3hours



RoHS EMC CE IK08 IP66





PRODUCT FEATURES

- Housing: PC
- Reflector: Steel plate Aluminum plate
- High Lighting Efficiency: $\geq 130\text{lm/w}$

APPLICATION PLACES

- Can be applied in wet interior, dusty place and outdoor places, such as factory, warehouse, pharmaceutical&food industry, cold store, car parking, tunnel, bathroom, etc.



ITEM CODE	VOLTAGE	POWER	LUMEN	LED	LED QTY	REPLACE	CLIPS QTY	QTY/CTN	DIMENSION (L*W*H*LF)
3+I81-106E	220-240V	10/12W	1000/1200lm	SMD2835	48/60pcs	18W	6pcs	12pcs	653x85x87x416mm
3+I81-112E	220-240V	20/24W	2000/2400lm	SMD2835	96/120pcs	36W	10pcs	9pcs	1263x85x87x838mm
3+I81-115E	220-240V	25/30W	2500/3000lm	SMD2835	120/156pcs	58W	14pcs	9pcs	1563x85x87x1130mm
3+I81-206E	220-240V	20/24/34/53W	2600/3120/4420/6890lm	SMD2835	96/120pcs	2x18W	6pcs	9pcs	653x130x87x416mm
3+I81-212E	220-240V	40/48W	4000/4800lm	SMD2835	192/240pcs	2x36W	10pcs	6pcs	1263x130x87x838mm
3+I81-215E	220-240V	50/60/80W	5000/6000/8000lm	SMD2835	40/312/416pcs	2x58W	14pcs	6pcs	1563x130x87x1130mm

3000K 4000K 6500K

