



TRIPLE PLUS

Flexible LED Strip Light




IP RATING 20



IP RATING 65 (SILICON COATED)

Code	Power(W)	Volatge(V)	Lumen/W	CCT	CRI	Cutting Lenght	IP
3+5630	4.8W/Meter	12V / 24V	100-120Lm/Watt	2700K-6000K/RGB	≥90	Every 5cm	IP20/IP65
3+5630	9.6W/Meter	12V / 24V	100-120Lm/Watt	2700K-6000K/RGB	≥90	Every 5cm	IP20/IP65
3+5630	14.4W/Meter	12V / 24V	100-120Lm/Watt	2700K-6000K/RGB	≥90	Every 5cm	IP20/IP65

DIMENSIONS

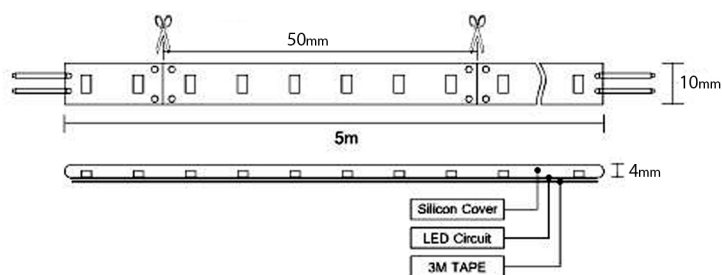

LED EPISTAR / Bridgelux SMD

Beam Angle Diffused Beam : 120°

Working Temperature -20°C ~ +55°C



EPISTAR



bridgeLux®

MONOCOLOR STRIP INSTALLING OPTION



RGBCOLOR STRIP INSTALLING OPTION

