

outdoor



TRIPLE PLUS




3+SM8522-10
3+SM8522-15
3+SM8523-20

LED	CREE / Bridgelux COB
Beam Angle	Spot Beam : 15° Medium Beam : 24° / 38° Wide Beam : 60° Elliptical Beam : 5°+25° , 15°+55°
Tilt Rotation	Fixed
Material	Die-cast Aluminium
Diffuser	Clear Glass / Frosted Glass
Reflector	Chrome
Colour	Black / White
Working Temperature	-20°C ~ +60°C
Mounting	Ceiling Surface


Any body RAL colour is available on demand

Specifications


Code	Power (W)	Voltage (V)	Lumen Efficiency (Lm/W)	Colour Temperature (K)	CRI	IP Rating
3+SM8522-10	10W	220V-240V	110Lm/W	3000K-6000K	≥90	IP44
3+SM8522-15	15W	220V-240V	110Lm/W	3000K-6000K	≥90	IP44
3+SM8523-20	20W	220V-240V	110Lm/W	3000K-6000K	≥90	IP44




3+SM8522-10



3+SM8522-15



3+SM8523-20

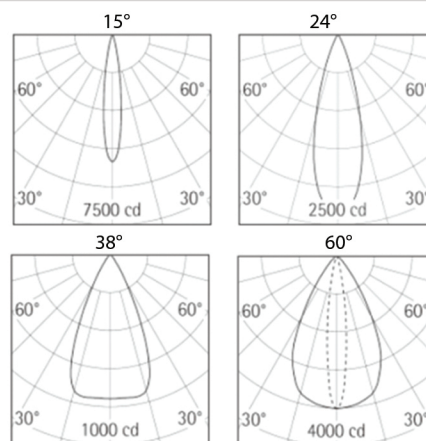

CREE

bridgelux®

CE ERP

RoHS compliant

